


# BASECRETE + POOL SHELL AND POOL TILE WATERPROOFING SYSTEM GUIDE

## GLASS POOL TILE – P602 TCNA Standard

1. Pressure wash and clean area to be tiled with **Basecrete Pool Shell Cleaner**.
  - **BTH-37-1015** Basecrete Pool Shell Cleaner
2. Stabilize the pH - Apply **Basecrete Pool Shell pH- Stabilizer**. Cure 24 hours.
  - **BTH-37-1014** Basecrete Pool Shell Stabilizer
3. **Primary Waterproofing** - Apply **Basecrete + Pool Shell Primary Waterproofing** (Penetrating Colloidal Silicate). Cure 24 hours.
  - **BTH-37-1013** Basecrete Pool Shell Primary Waterproofing
4. Pressure wash and clean pool shell surface.
5. Apply approved **Mortar Bed Bond Coat** -Basecrete Bond Coat
6. Install approved **Mortar Bed**
7. **Secondary Waterproofing / Bond Coat** - Apply **Basecrete Secondary Waterproofing / Bond Coat** to a lightly dampened surface. Cure 48 hours.
  - **BTH-37-1001** Part 1 of 2 – One (1) 5 gal. of liquid **and**
  - **BTH-37-1002** Part 2 of 2 – Three (3) 50 lbs. of Grey Compound **or/**
  - **BTH-37-1003** Part 2 of 2 – Three (3) 50 lbs. of White Compound **or/**
  - **BTH-37-1004** Part 2 of 2 – Three (3) 50 lbs. of Black Compound
8. Apply approved **Tile Bond Coat Adhesive**
9. Install tile
10. Install **Grout**

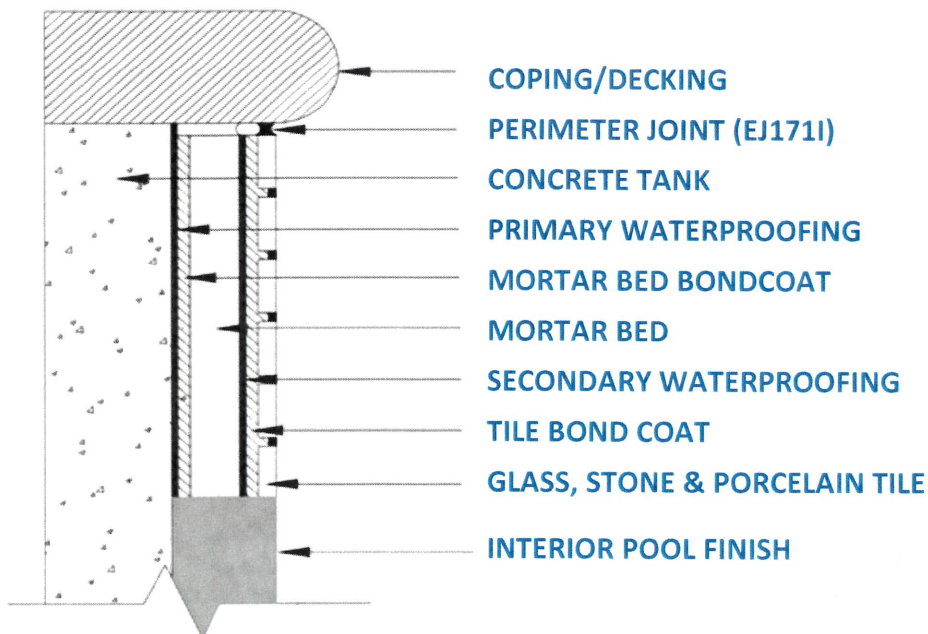

# BASECRETE + POOL SHELL REMODEL AND NEW POOL SHELL CONSTRUCTION GUIDE

1. Pressure wash and clean pool shell surface with **Basecrete Pool Shell Cleaner**.
  - **BTH-37-1015** Basecrete Pool Shell Cleaner
2. Stabilize the pH - Apply **Basecrete Pool Shell pH- Stabilizer**. Cure 24 hours.
  - **BTH-37-1014** Basecrete Pool Shell pH- Stabilizer
3. **Primary Waterproofing** - Apply **Basecrete + Pool Shell Primary Waterproofing** (Penetrating Colloidal Silicate). Cure 24 hours.
  - **BTH-37-1013** Basecrete + Pool Shell Primary Waterproofing
4. Pressure wash and clean pool shell surface
5. Install high strength **Basecrete Reinforcing Mesh** over transition areas, joints, change of planes, cracks and fractures in pool shell using Basecrete Secondary Waterproofing.
  - **BTH-37-1008** Basecrete 4" x 150' Reinforcing Mesh
  - **BTH-37-1009** Basecrete 9.5" x 150' Reinforcing Mesh
  - **BTH-37-1010** Basecrete 12" x 150' Reinforcing Mesh
  - **BTH-37-1011** Basecrete 38" x 150' Reinforcing Mesh
6. **Secondary Waterproofing / Bond Coat** - Apply **Basecrete Secondary Waterproofing / Bond Coat** to a lightly dampened surface. Cure 48 hours.
  - **BTH-37-1001** Part 1 of 2 – One (1) 5 gal. of liquid **and**
  - **BTH-37-1002** Part 2 of 2 – Three (3) 50 lbs. of Grey Compound **or/**
  - **BTH-37-1003** Part 2 of 2 – Three (3) 50 lbs. of White Compound **or/**
  - **BTH-37-1004** Part 2 of 2 – Three (3) 50 lbs. of Black Compound
7. Install **Plaster**

## BASECRETE RECOMMENDED CURE TIMES

- Basecrete Pool Shell **pH-** Stabilizer – 24 hours
- Basecrete + Pool Shell Primary Waterproofing – 24 hours
- Basecrete + Secondary Waterproofing / Bond Coat – 48 hours

Products may be purchased at your local Poolcorp, NPT, SCP or Superior Pool Product Distributor.

BASECRETE PRODUCTS ARE APPROVED AND RECOMMENDED FOR PRIMARY AND SECONDARY WATERPROOFING FOR POOL SHELLS BY NPT, SCP, SPP, OCEANSIDE GLASS AND TILE AND GENESIS.

BASECRETE PROUDLY SPONSORS GENESIS AND TRIBUTARY.

For technical questions please contact: Vito Mariano - 941-879-4600

For sales, support and training assistance please contact: Beau Lamb - 561-389-8806

For general questions call or email us:

Home Office: 941-312-5142

Email: [info@basecreteusa.com](mailto:info@basecreteusa.com)